


Pyroelectric Detector LHi 968

Dual Element configuration including FET and optical window RFI protection

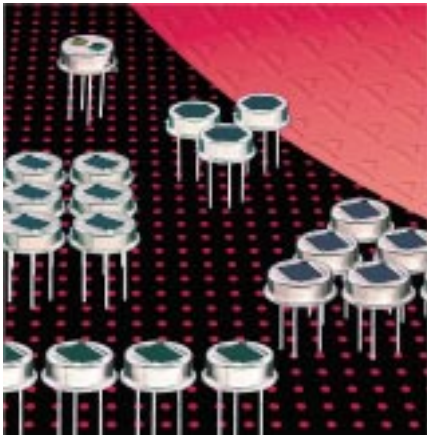


High End Dual Element Detector

Designed for PIR Alarms



The **LHi 968** pyroelectric infrared-detector series is specially designed for Intrusion Alarm applications. It includes a dual element pyroelectric ceramic with FET in source follower connection and RF protection by a resistor and capacitor circuit.

This detector is available in **TO-5** housing with an infrared filter which protects the elements from strong white light disturbance. It offers high responsivity with excellent common mode performance (match) and low noise.



Field of View

Parameters	LHi 968			
	min	typical	max	units condition
Element size		2x1		mm ² (2 Elements)
Responsivity	3300	4000		V/W 1Hz
Match		1	10	%
Noise		20	50	μV _{pp} 0,3...10 Hz
Offset Voltage	0,2		1,5	V 47kΩ
D*	5x10 ⁷	19x10 ⁷		cmHz/W 1Hz, 1Hz Bw
Output Impedance		5	10	kΩ RS=47kΩ
Operating Voltage	2		12	V RS=47kΩ
Field of View, horizontal		100°		unobstructed
Field of View, vertical		100°		unobstructed
Operating Temperature	-40		85	°C non permanent
Storage Temperature	-40		85	°C non permanent

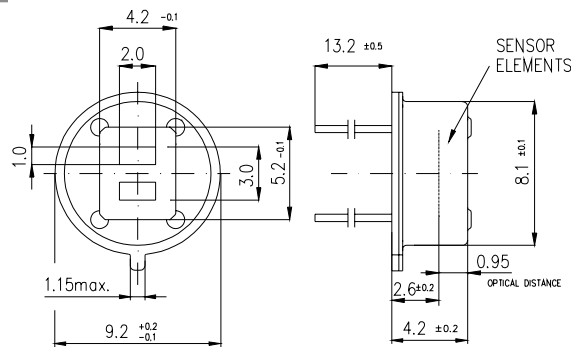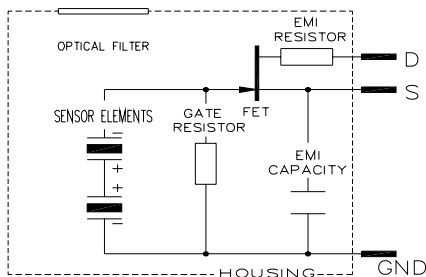

Dimensions in mm

